


Thread Types:
 1 1/8"-12UNF-2B
 25E-EN 629-1

Service Pressure:		3600 psi 248 bar
Hydrostatic Test Pressure:		5400 psi 372 bar
Minimum Burst Pressure:		8100 psi 558 bar
Cylinder design, manufacturing and testing in according to:		acc. to NGV 2
Design service life:		20 years
Operating temperatur cylinder:		-40 ...+82°C
Gas:		Natural Gas
Liner:	Material:	Polyethylen
Metallic Bosses:	Material:	304
Wrapping:	Fiber Material:	Carbon/Glass Fiber
	Resin / Hardener / Catalysts:	Epoxy Resin

A (1 : 2)

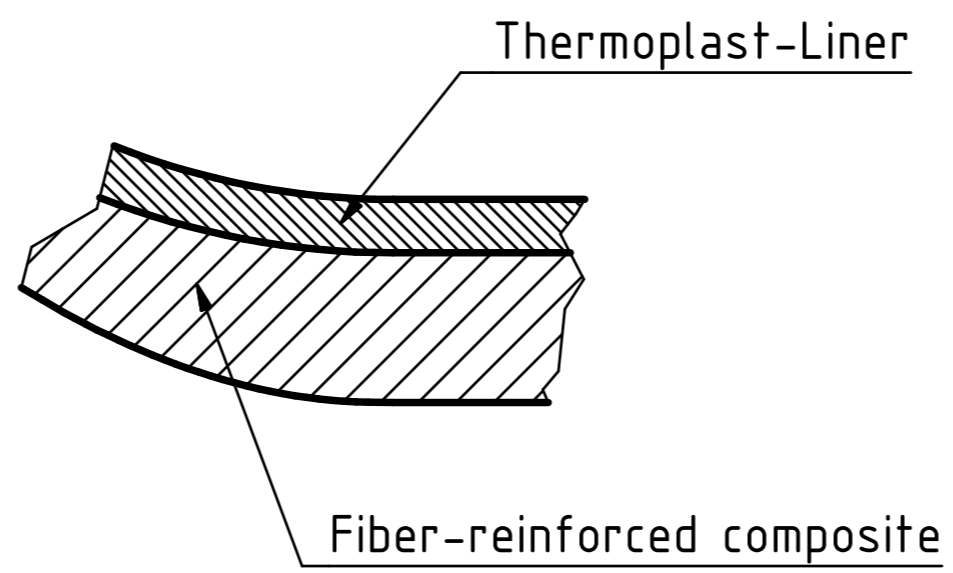

Type :	21" x 60"
Volume @Pw +- 2% Liter:	253,2
Total weight +- 3%:	183 lbs. - 83 kg
Lenght L +-0,4":	60" - 1524mm

Untoleranced dimension as per ISO 2768-mk		Copyright as per DIN 34		Scale: 1:5	
Surface quality as per DIN ISO 1302		DIN ISO 16016			
Workpiece edge as per DIN 6784					
		Datum	Name	Offer Drawing $\varnothing 21'' \times 60''$ Strap Mount	
		Author	26.11.2014 Mathis		
		Checked	26.11.2014 Limke		
		Norm			
				0038-04-00-00	
				1	
Status	Changes	Datum	Name	A3	